


Hind Express


42m High Speed Supply / Crew & Utility Vessel

Triple screw vessel is steel hull construction , designed for operations coastal and open sea with high-speed service in oil fields, the vessel is licensed for 60 passengers in comfortable seats air craft seats, (main deck level), as well as a moderate quantity of deck cargo.

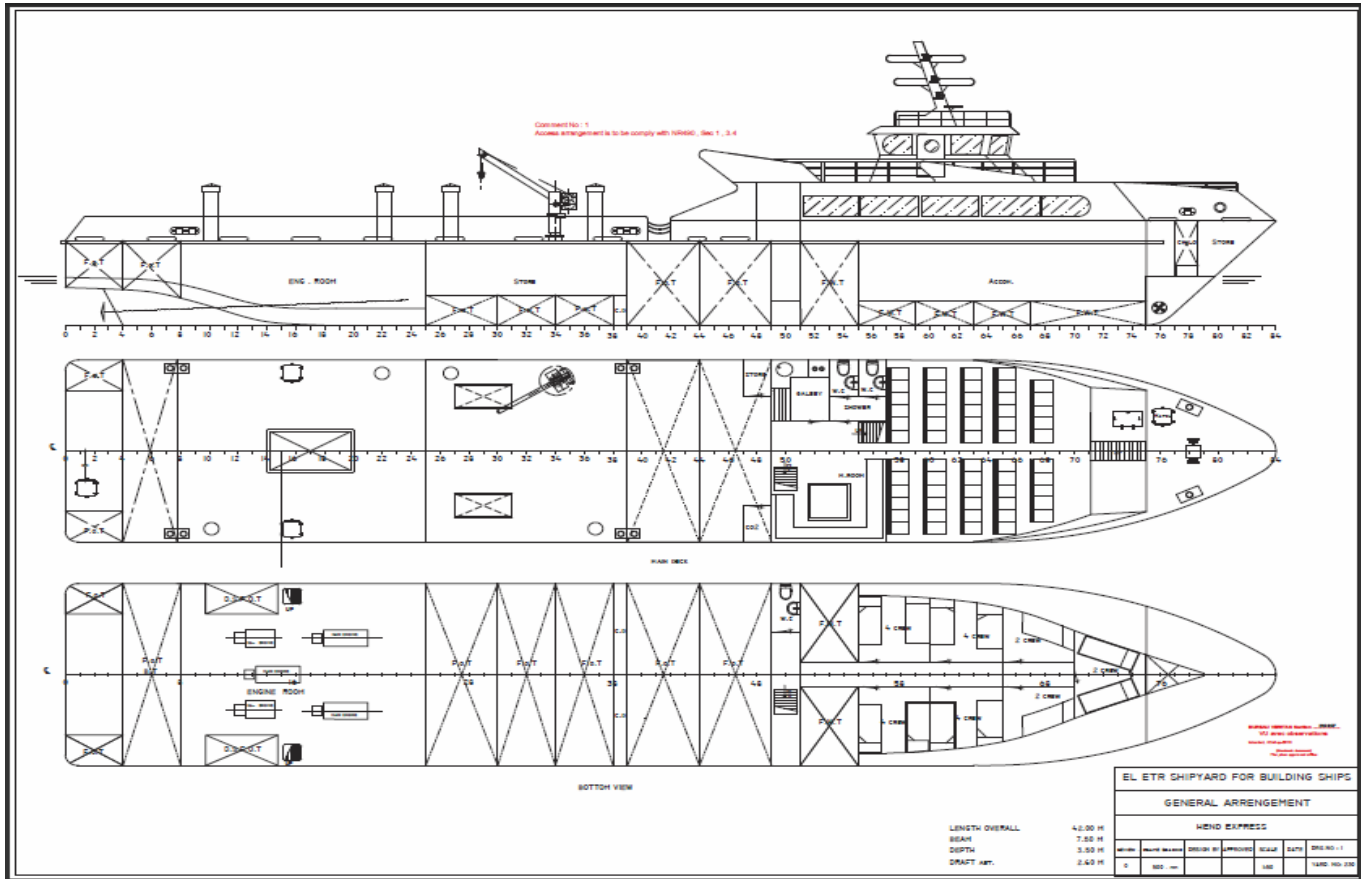

Hind Express Technical Specifications

General Characteristics		Main Engines & Propellers	
Vessel Name	Hind Express	Engines	2x CAT 3512 + 1x CAT 3508
Description	Fast Supply / Crew & Utility Vessel	Total Power	2x 1280 BHP @ 1800 rpm + 1X 1000 BHP @ 1800 rpm
Classification	Bureau Veritas	Consumption	Service Speed (5-8 Kts), 8,500 ltrs/day
Flag	United Arab Emirates	Maximum Speed	23 Kts
Port of Registration	Port Khalid – Sharjah, UAE	Propellers	3 Fixed Pitch Propellers
Owner	Siraj Marine Services	Bow	1x 120 Kw, Tunnel Bow Thruster
Builder	ELE Shipyard, Port Said, Egypt	Generators	2x 120 kva + 1x 22 kva, 380V, 50Hz, 3-phase
Principal Characteristics		Deck Equipment	
GRT	152 Ton	Anchor Capstan	Included
NRT	46 Ton	Bollards	6 bollard for mooring purpose
Moulded Length	42 M	Deck Crane Capacity	5 Ton, Knuckle-Telescope Crane
Moulded Breadth	7.5 M	Fastening & Lashing	2x 20 ft containers or 1x 40 ft container
Moulded Depth	3.5 M		
Moulded Draught	2.6 M		
Accommodation		Cargo Capacities	
Single Rooms	2 cabins	Clear Deck Area	160 M ² space
Double Rooms	6 cabins	Deck Strength	3 Ton/M ²
Store	7 M length (below main deck)	Fresh Water	60 M ³
Saloon	8 M length (main deck)	Fuel Diesel Oil	180 M ³
Galley	1 (main deck)	Waste Oil	8.5 M ³
Mess Room	1 (main deck)		
Passenger Seats	60 comfortable aircraft seats (8 VIP)		
Medical Lockers	IMO Standard		
Nautical, Surveillance & Communication Equipment		Fire & Safety Equipment	
According to GMDSS	Area A3	Life Rafts	3 Life Rafts, 20 persons each
Search Lights	2x Pesch 1000 W	Life Buoys	6 pcs with light & smoke signal, 2 pcs with 30m line
Magnetic Compass	1x Cassens & Plath Reflecta 1	Life Jackets	90 pieces
GYRO Compass	1x Anschuetz Standard 22 Compact	Fire Extinguishers	15 pcs fire extinguishers
Radar System	1x Furuno FR-2117B	Fi-Fi-1 System	CO2 Fixed Fi-Fi System Portable Hand-Operated Fi-Fi Hydraulic Seawater Fi-Fi
AIS	1x Furuno Fa-150	Fire Boxes & Hoses	6 Fire Box complete with hoses and dual-purpose nozzles
D-GPS	1x Furuno Gp-150		
Gyro Compass	1x Raytheon Anschuetz STD 22		
Autopilot	1x RH Sea/River Pilot 75		
NAVTEX	1x Furuno NX 700		
SSB/DSC	1x Furuno, Type Fs-1570		
Communication	1x Inmarsat C, Satellite Telephone, GSM		
Echo Sounder	1x Furuno FE 700		
Handheld VHF	2x Jotron TRON TR20		
Watch Alarm	1x Marble 421		
VHF Radio Telephone	2x Sailor 5022 with DSC + 1x Sailor 4800		
CCTV	1x Orlaco		

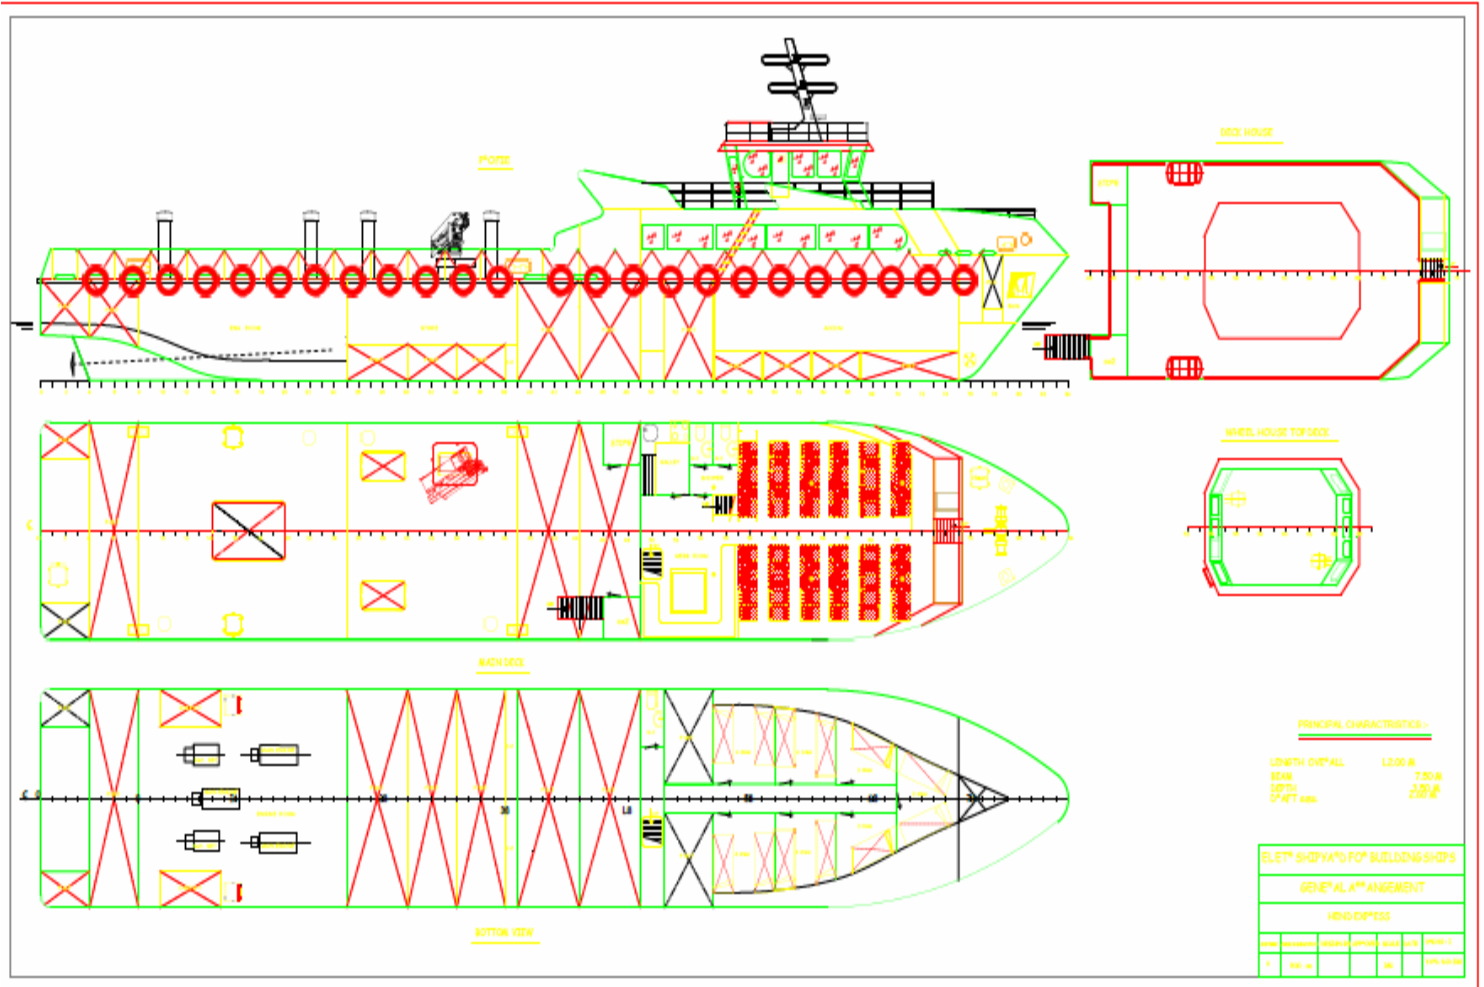

PRINCIPAL CHARACTERISTICS:-

LENGTH OVER ALL 12.00 M
BEAM 7.50 M
DEPTH 2.20 M
DRAFT 1.80 M

ELET'SHOPYA'NO FOR BUILDING SHIPS

GENERAL ARRANGEMENT					
HIND EXPRESS					
NO	DESCRIPTION	NO	DESCRIPTION	NO	DESCRIPTION
1